

The Brewmaster® Ceiling Fan Assembly

INSTALLATION REQUIREMENTS:

We recommend that each fan and the motor have 3/4" plywood backing secured to a structural member for adequate support. Each fan assembly consists of 1 motor and 1 pulley/blade assembly. The motor unit can operate up to 4 pulley/blade assemblies maximum, which will reduce the rpm. Call tech support for more information.

ELECTRICAL REQUIREMENTS:

A 120 VAC, 60 Hz, 15 amps electrical feed, centered under the motor unit and wired to a C20 remote control (supplied) is required. 3-speed, reversible control receiver included (located in switch cap housing). 220 VAC, 50 Hz export version is available.

FAN SPEEDS:

Will vary according to the blade set. Material, shape, and size of fan blade will affect the speed of the fan. In general, the larger blades (22") will turn slower than the smaller blades (18") and the narrower blades (narrow oval & oar shaped) will turn faster than the wide oval blades.

CONTROL OPTIONS:

The hand-held remote control (C20) and switch cup receiver (CR1280) are included. Optional fan & light pushbutton wall control (C21) is available. Both of controls may be used independently or together. Installation instructions provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. Can be only mounted on the motor switch cap housing. Installation instructions provided with each light fitter and light kit. See Catalog or visit our website, www.fanimation.com for more lighting options.

OPTIONAL BLADE SETS:

Blade sets consist of 2 blades; priced and sold separately. Blades are available in reversible oak/walnut, cherrywood, rosewood, natural palm (BMP series), woven bamboo (BMD series), wicker (BMW series). Natural palm blades are available in 3 shapes; Woven bamboo blades are available in 4 finishes and 3 shapes; Wicker blades available in 2 shapes. See Catalog or visit our website, www.fanimation.com for more blade options.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com


Copyright 2005 Fanimation, Inc.



2005/11

The Brewmaster®

FP10/20 - Pulley Unit / FP1280 - Motor

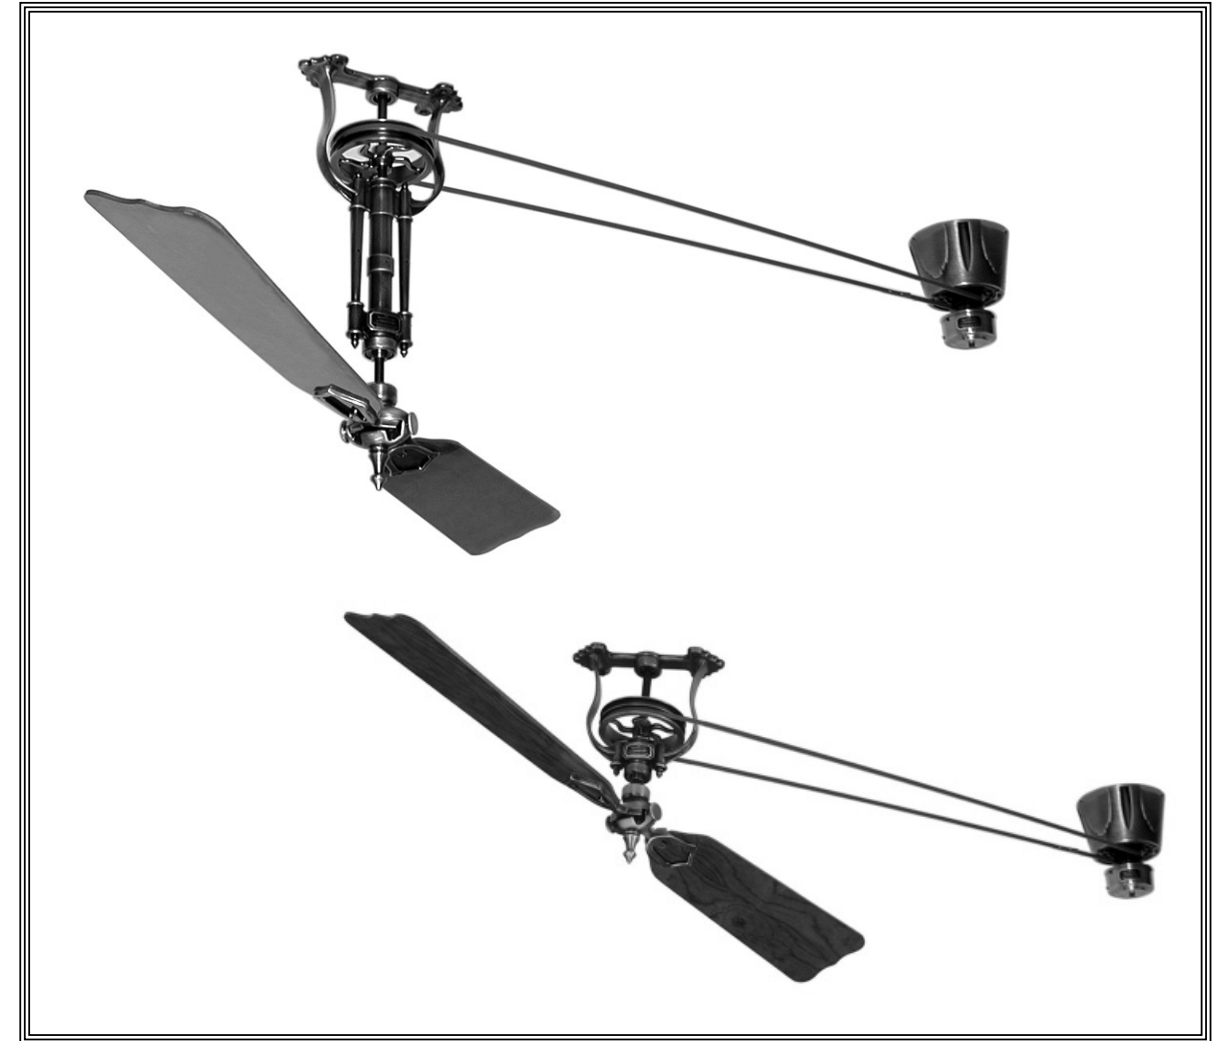

SPECIFICATION SHEET




Product Specifications subject to change

The Brewmaster® Long Neck Fan Assembly

Long Fan Assembly - FP20**		
A	Overall Length†	14' Max - 4' Min
B	Fan Base Length	12"
C	Fan Base Width	4"
D	Overall Drop	26"
E	Blade Sweep	56"*
F	Motor Base Diameter	8"
G	Motor Assembly Height	10"

**Insert Finish Codes Dimensions shown in inches
*Wood Blades (22" palm, wicker, bamboo - 50")
†Maximum distance between motor and fan pulley is 14', maximum distance between two fan pulley assemblies is 13½'

Motor Unit FP1280**
FK-2100 Motor: 120 volt, 60 Hz, 0.90 amps Ceiling Mount, Remote Control Receiver included (in Switch Cap) RPM: High-91; Med-62; Low-42 Finishes: available in 4 finishes

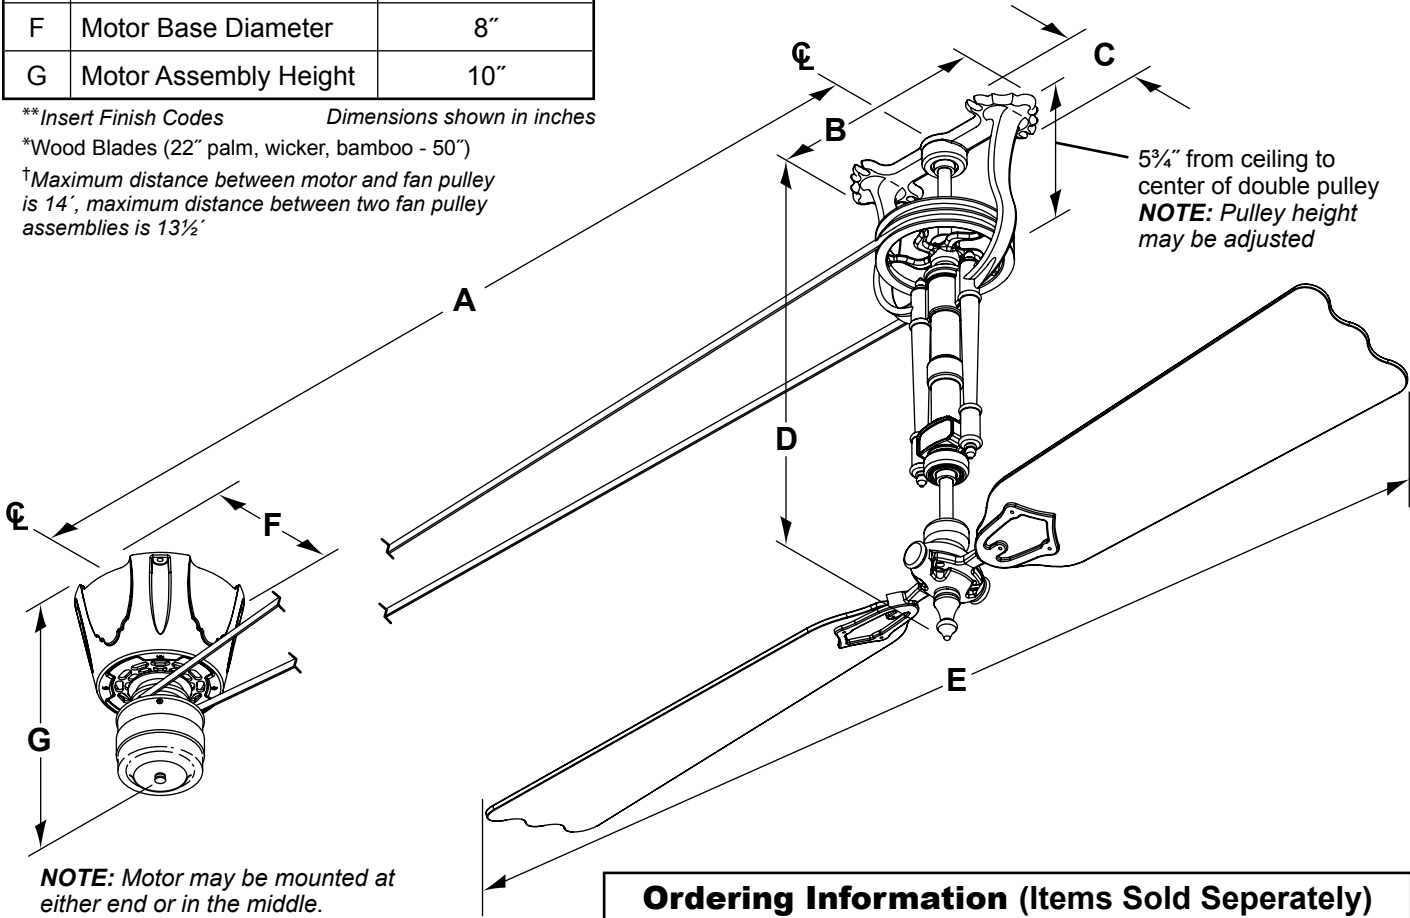


Ordering Information (Items Sold Separately)		
Item	Catalog No.	Description
Long Fan Assembly	FP20**	1-Long Pulley Assembly 30 ft. of 3/8" belt 2-traditional blade holders 2-wood blade holders 4-hardware bags
One Motor Unit	FP1280**	Three-speed, reversible 1-splice/hardware kit 1-"C20" remote control 1-mounting hardware bag
Blade Sets (Order Separately) See page 4 for other BM series blade options	FP1022	Reversible Oak/Walnut
	FP1026	Cherrywood
	FP1030	Rosewood (glossy)

**Insert Finish Codes

220V Model (Export version)

Motor Assembly - 220 volt, 50 Hz
Ceiling Mount, Non-Remote
2 Speeds, RPM: High-91; Low-42
Finishes: available in 4 standard finishes

The Brewmaster® Short Neck Fan Assembly

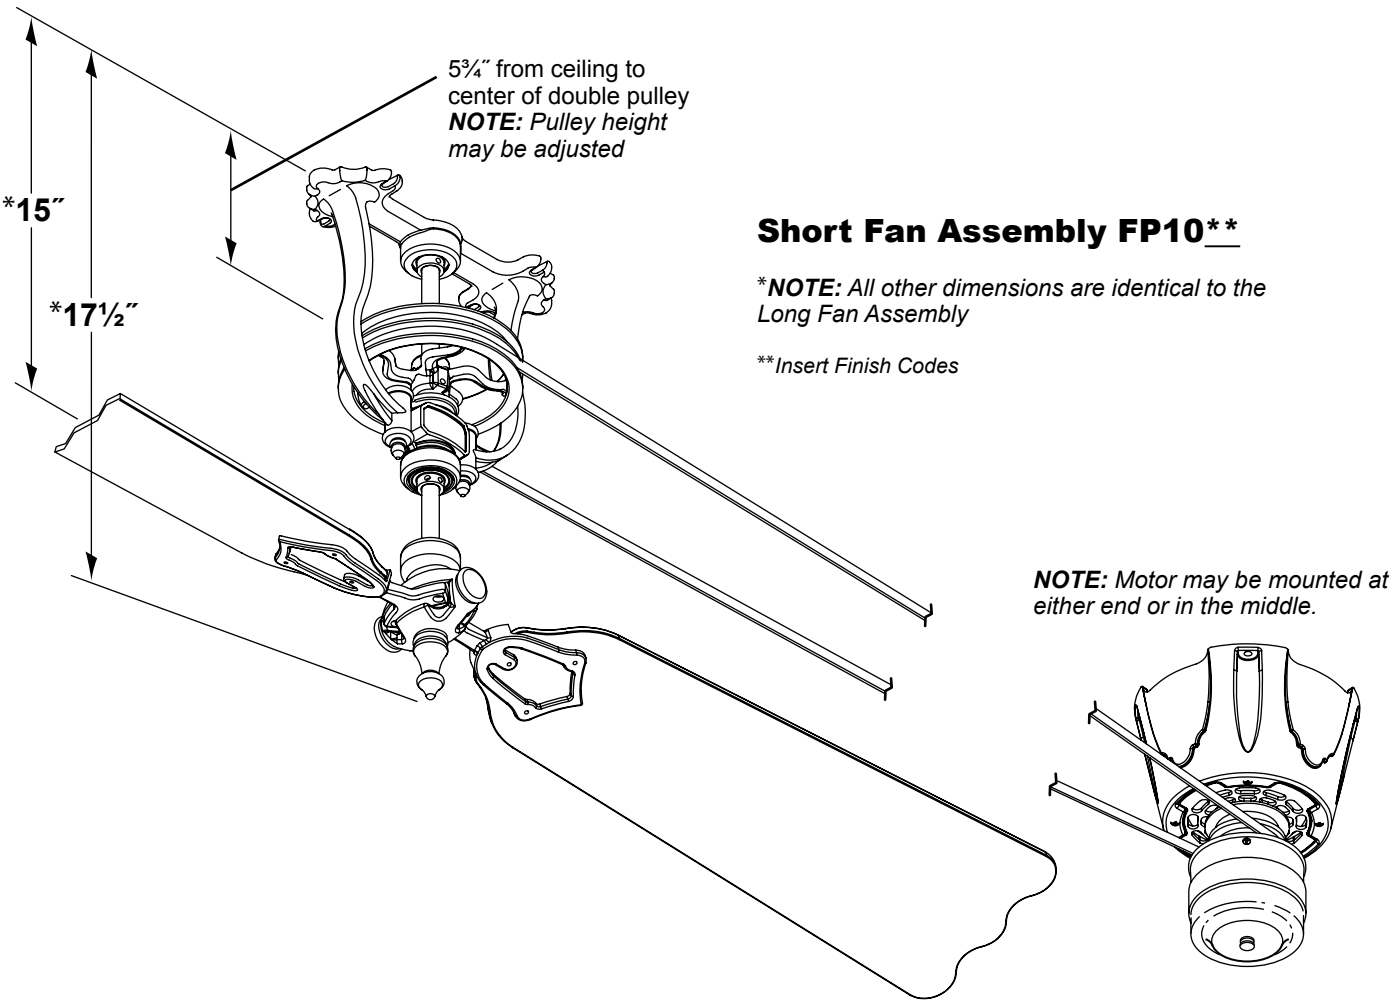

Short Fan Assembly FP10**

*NOTE: All other dimensions are identical to the Long Fan Assembly

**Insert Finish Codes

Ordering Information (Items Sold Separately)		
Item	Catalog No.	Description
Short Fan Assembly	FP10**	1-Short Pulley Assembly 30 ft. of 3/8" belt 2-traditional blade holders 2-wood blade holders 4-hardware bags
One Motor Unit	FP1280**	Three-speed, reversible 1-splice/hardware kit 1-"C20" remote control 1-mounting hardware bag
Blade Sets (Order Separately) See page 4 for other BM series blade options	FP1022	Reversible Oak/Walnut
	FP1026	Cherrywood
	FP1030	Rosewood (glossy)

**Insert Finish Codes

**Available Finish (codes)

AB	Antique Brass
AC	Antique Copper
BL	Black
PW	Pewter