

The CentaurusTM

FP4220 Series




SPECIFICATION SHEET



Product Specifications subject to change

The Centaurus™ Fan Assembly – FP4220**

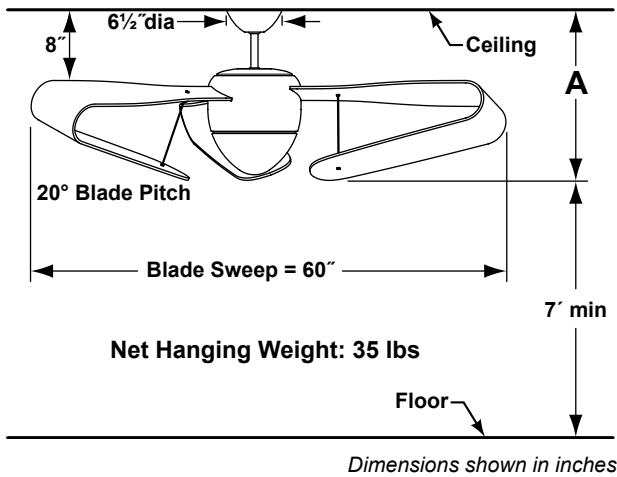

Available Finishes	
BL	Black
SN	Satin Nickel

Fan Assembly	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 3 fan speeds with reversing control.

Fan Speeds: Low – 50 rpm; Med – 65 rpm; High – 80 rpm

CONTROL OPTIONS:

The hand-held, reversing remote control (C20) and canopy-style receiver unit (RECAN68) are included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, reverse and off button. Installation and operating instructions provided with control.

LIGHTING OPTIONS:

The 3-bulb (25 watt max) downlight fixture is included with this fan assembly (candelabra bulbs - not included). Maximum wattage of downlight not to exceed 75 watts.

DOWN ROD OPTIONS:

The Centaurus™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Centaurus™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 3-blade set required - sold separately. Bent-blade material is wood, 5-layer. Available finishes are BB4220CY (Cherry), BB4220MH (Mahogany) and BB4220MP (Maple). See Catalog or visit our website, www.fanimation.com for more information.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com

