

The Evanesce[®]

FP2700BL




SPECIFICATION SHEET



Product Specifications subject to change

The Evanesce® Fan Assembly – FP2700BL

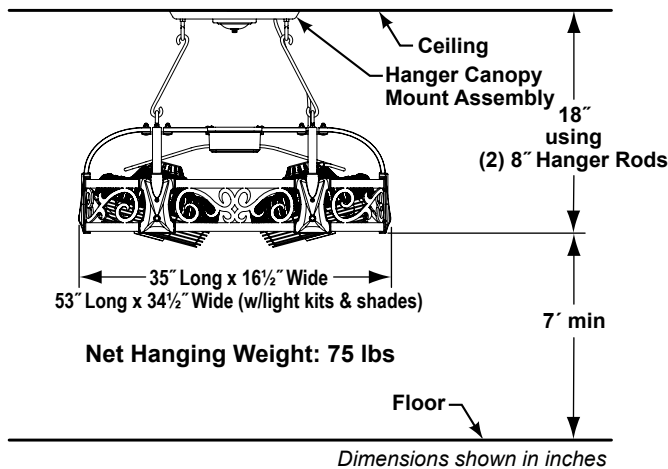

Available Fan Finish

BL	Black
----	-------

Available LK Finishes

BL	Black
PC	Polished Copper
SN	Satin Nickel



INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 100 pounds. Two hanging options are available: Hanger canopy mount or hanger eye-bolt mount.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

FAN SPEEDS:

Fan heads (non-oscillating) pivot independently. 3-speeds, non-reversing. RPM's; Low - 900, Med - 1200, High - 1500

CONTROL OPTIONS:

The hand-held remote control (C24) and wireless wall control (C25, includes white faceplate) and receiver (P2704) are all included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, continuous light dimming controls (360 watt max), and off button. Installation and operating instructions provided with each control.

HANGER OPTIONS:

Both Hanger Canopy Mount and Hanger Eye Bolt Mount options are available with this fan assembly. Includes Hanger Canopy assembly, 80" chains (2), 8" Hanger Rods (4), Hanger Eye Bolts (2) and "S" Hooks (4).

LIGHTING OPTIONS:

One to six light arms may be used with or without optional shades. Requires one 60-watt max candelabra bulb per light arm (not included). Available in three different finishes. Maximum wattage not to exceed 360 watts.

SHADES OPTIONS:

(Sold separately) are available in four different styles and colors. See Catalog or visit our website, www.fanimation.com for more shade selections.

DAMP LOCATION:

Fan not rated for Damp Location usage.



**10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com**

