


The Islander[®]

FP320 Series




SPECIFICATION SHEET

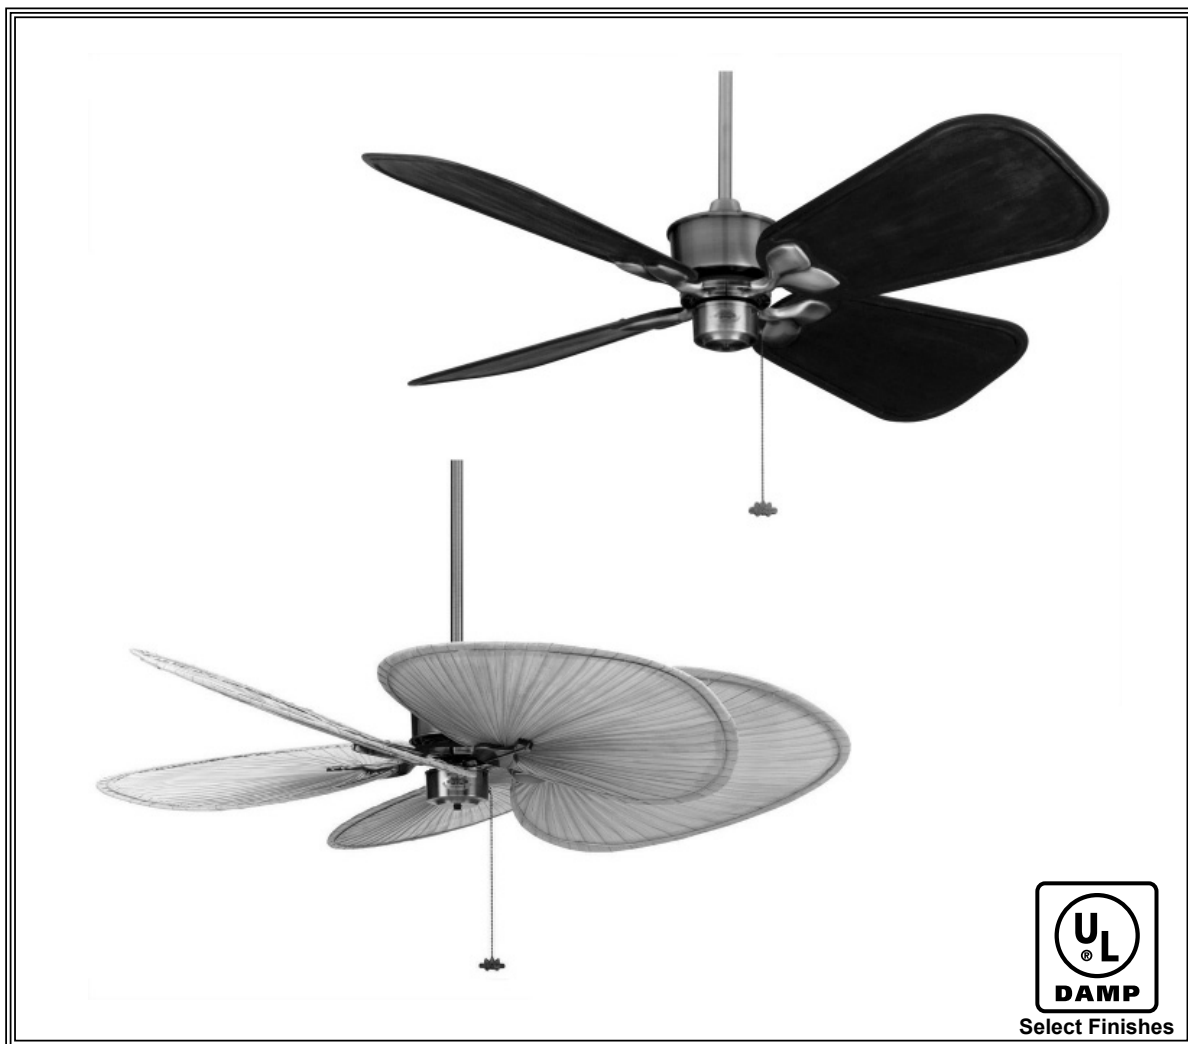

Product Specifications subject to change

The Islander® Fan Assembly – FP320**

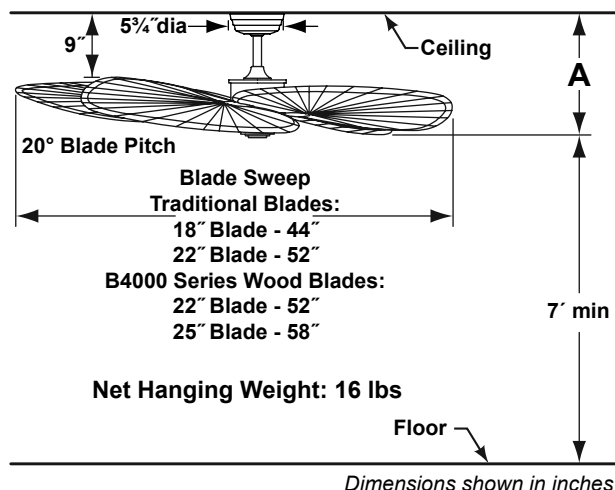

Available Finishes	
AB	Antique Brass
AC	Antique Copper
BL	Black (Damp)
GZ	Galvanized (Damp)
MC	Marbled Cream (Damp)
MW	Matte White (Damp)
OB	Oil-Rub'd Brnz (Damp)
PB	Polished Brass
PW	Pewter
RS	Rust (Damp)
SN	Satin Nickel

Fan Assembly	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a minimum load of 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version is available.

FAN SPEEDS:

Material, shape, and size of fan blade will affect the speed of the fan. In general, the larger blades (22") will turn slower than the smaller blades (18") and the narrower blades (narrow oval & oar shaped) will turn faster than the wide oval blades. For comparison the ISP1 blade set (22" wide oval palm blade set) turns at approximately the following speeds: 1st Pull-High-70 rpm, 2nd Pull-Medium-50 rpm, 3rd Pull-Low-25 rpm. The ISD4 (22" narrow oval woven bamboo) turns at approximately the following speeds: 1st Pull-High-103 rpm, 2nd Pull-Medium-73 rpm, 3rd Pull-Low-33 rpm. (All speeds listed are approximate and are given for comparison only)

CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, www.fanimation.com for more control options.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Islander® fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Islander® fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling kits are available for up to 52°. Call tech support for more information.

BLADE SETS:

Blade sets consist of either 4 blades or 5 blades depending on blade style. Mounting only four blades is an option and will increase speed and airflow. See Catalog or visit our website, www.fanimation.com for more blade selections.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com

