



# The Punkah™ Wall Mount Assembly

| Wall Assembly Specifications |                                 |                                                    |
|------------------------------|---------------------------------|----------------------------------------------------|
| A                            | Support Spacing                 | 12" to 4' *                                        |
| B                            | Fan Base Width                  | 4½"                                                |
| C                            | Blade Projection                | 21" with 18" Blades@30°<br>24" with 22" Blades@30° |
| D                            | Blade Projection                | 9½" with 18" Blades<br>11¾" with 22" Blades        |
| E                            | Blade Angle<br>(10° increments) | Wide Oval Blade, 30° max<br>Narrow Blade, 45° max  |
| F                            | Motor Assembly Unit             | 13¾" L x 7¼" W                                     |

**NOTES:** Installation is NOT recommended for sound sensitive areas.  
\*For spacing of 12" to 27½" cutting push rods is required.  
Not designed for significant air movement.  
Not recommended for Damp Location.

Dimensions shown in inches

| Weights (Approximate) |         |
|-----------------------|---------|
| Fan Assembly Unit     | 5 lbs   |
| Motor Assembly Unit   | 17½ lbs |

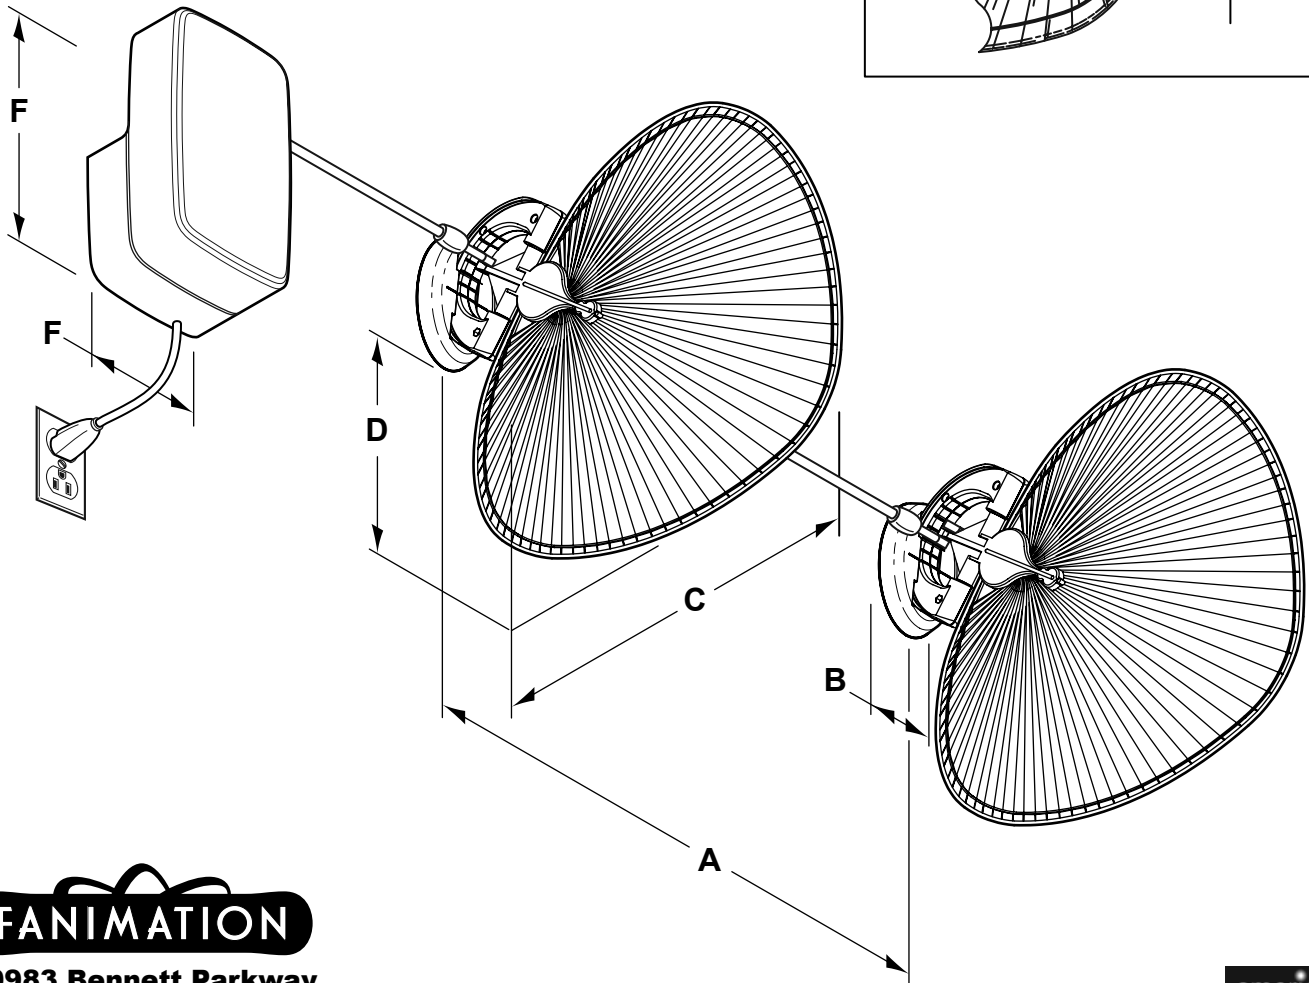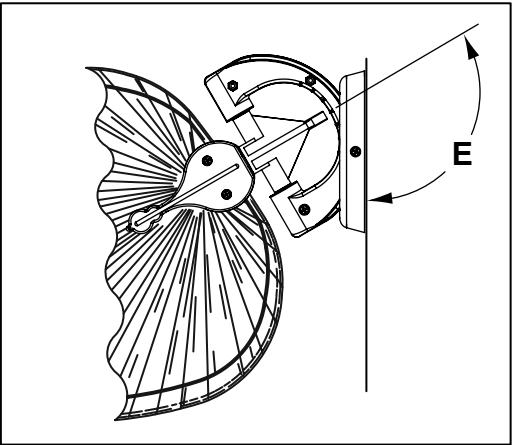


10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215  
Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)



Copyright 2006 Fanimation, Inc.  
2005/05

# The Punkah™

## FP720 - Ceiling/Wall Unit / FP780 - Motor

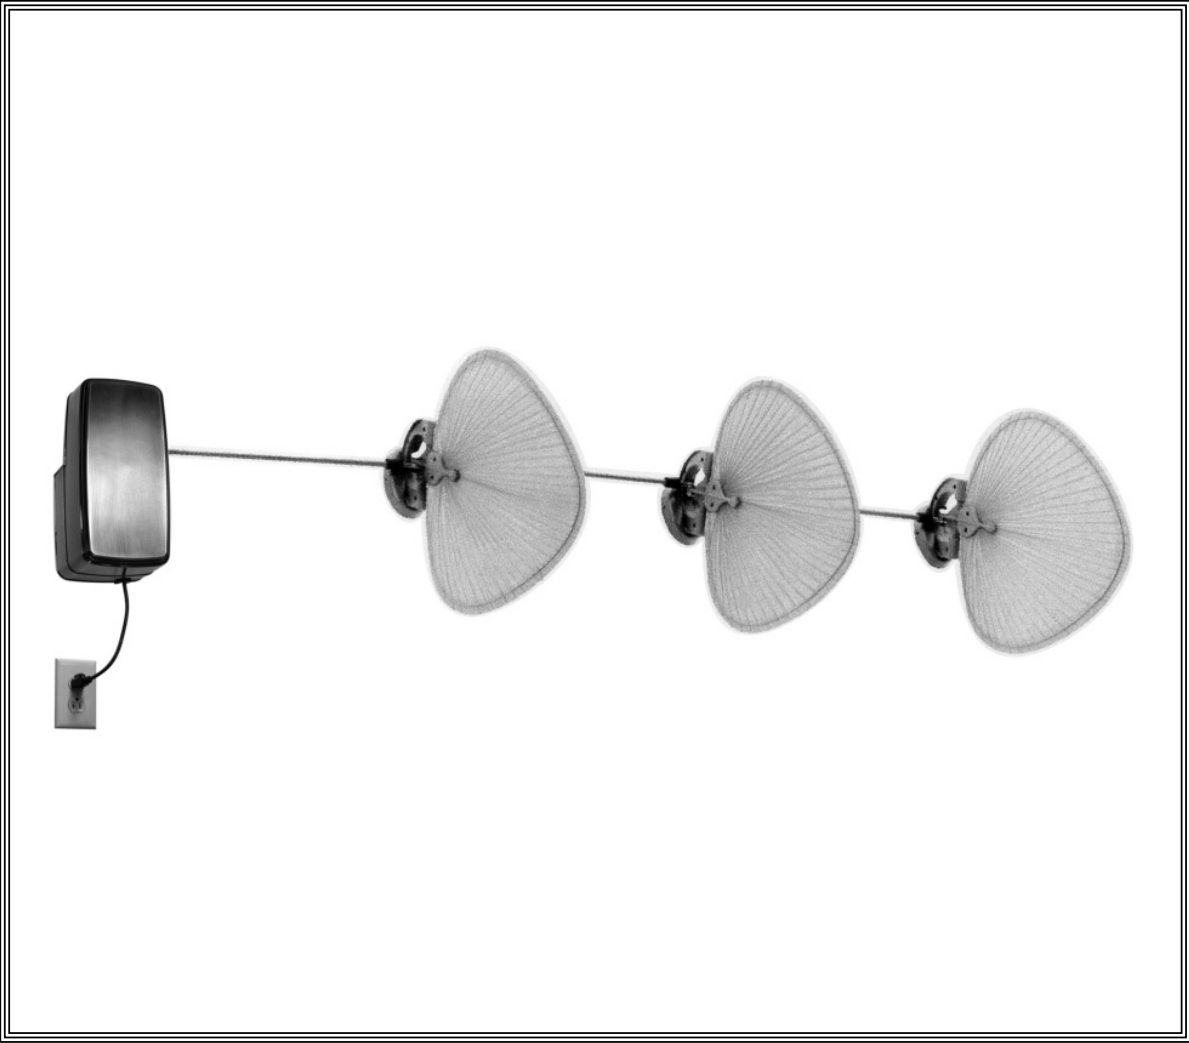

# SPECIFICATION SHEET



Product Specifications subject to change

# The Punkah™ Ceiling Mount Assembly

| Ceiling Assembly Specifications |                     |                                             |
|---------------------------------|---------------------|---------------------------------------------|
| A                               | Overall Length      | 4' to 24'                                   |
| B                               | Support Spacing     | 12" to 4'                                   |
| C                               | Fan Base Unit       | 4½" L x 4½" W                               |
| D                               | Overall Drop        | 23" with 18" Blades<br>27" with 22" Blades  |
| E                               | Blade Sweep         | 21" with 18" Blades<br>25½" with 22" Blades |
| F                               | Motor Assembly Unit | 13¾" L x 7¼" W                              |

Dimensions shown in inches

| Weights (Approximate) |         |
|-----------------------|---------|
| Fan Assembly Unit     | 5 lbs   |
| Motor Assembly Unit   | 17½ lbs |

**NOTES:** Installation is **NOT** recommended for sound sensitive areas.


\*For spacing of 12" to 27½" cutting push rods is required.  
Not designed for significant air movement.  
Not recommended for Damp Location.

## INSTALLATION REQUIREMENTS

It is recommended that each fan and the motor have ¾" plywood backing (12"x12" min.) snug behind the sheet rock for adequate support. This may also be done with continuous backing running the length of the fan system thus allowing the most flexibility in placing the blades.

## ELECTRICAL REQUIREMENTS

A 120 VAC electrical feed is required and should be accessible to the center of the motor. This circuit should be wired to an on/off switch (Motor is single speed). The motor assembly is supplied with a 2 ft. cord with plug. Motor assembly may be wired directly to electrical outlet box. The Fan Blades oscillates at approximately 18-20 rpm.

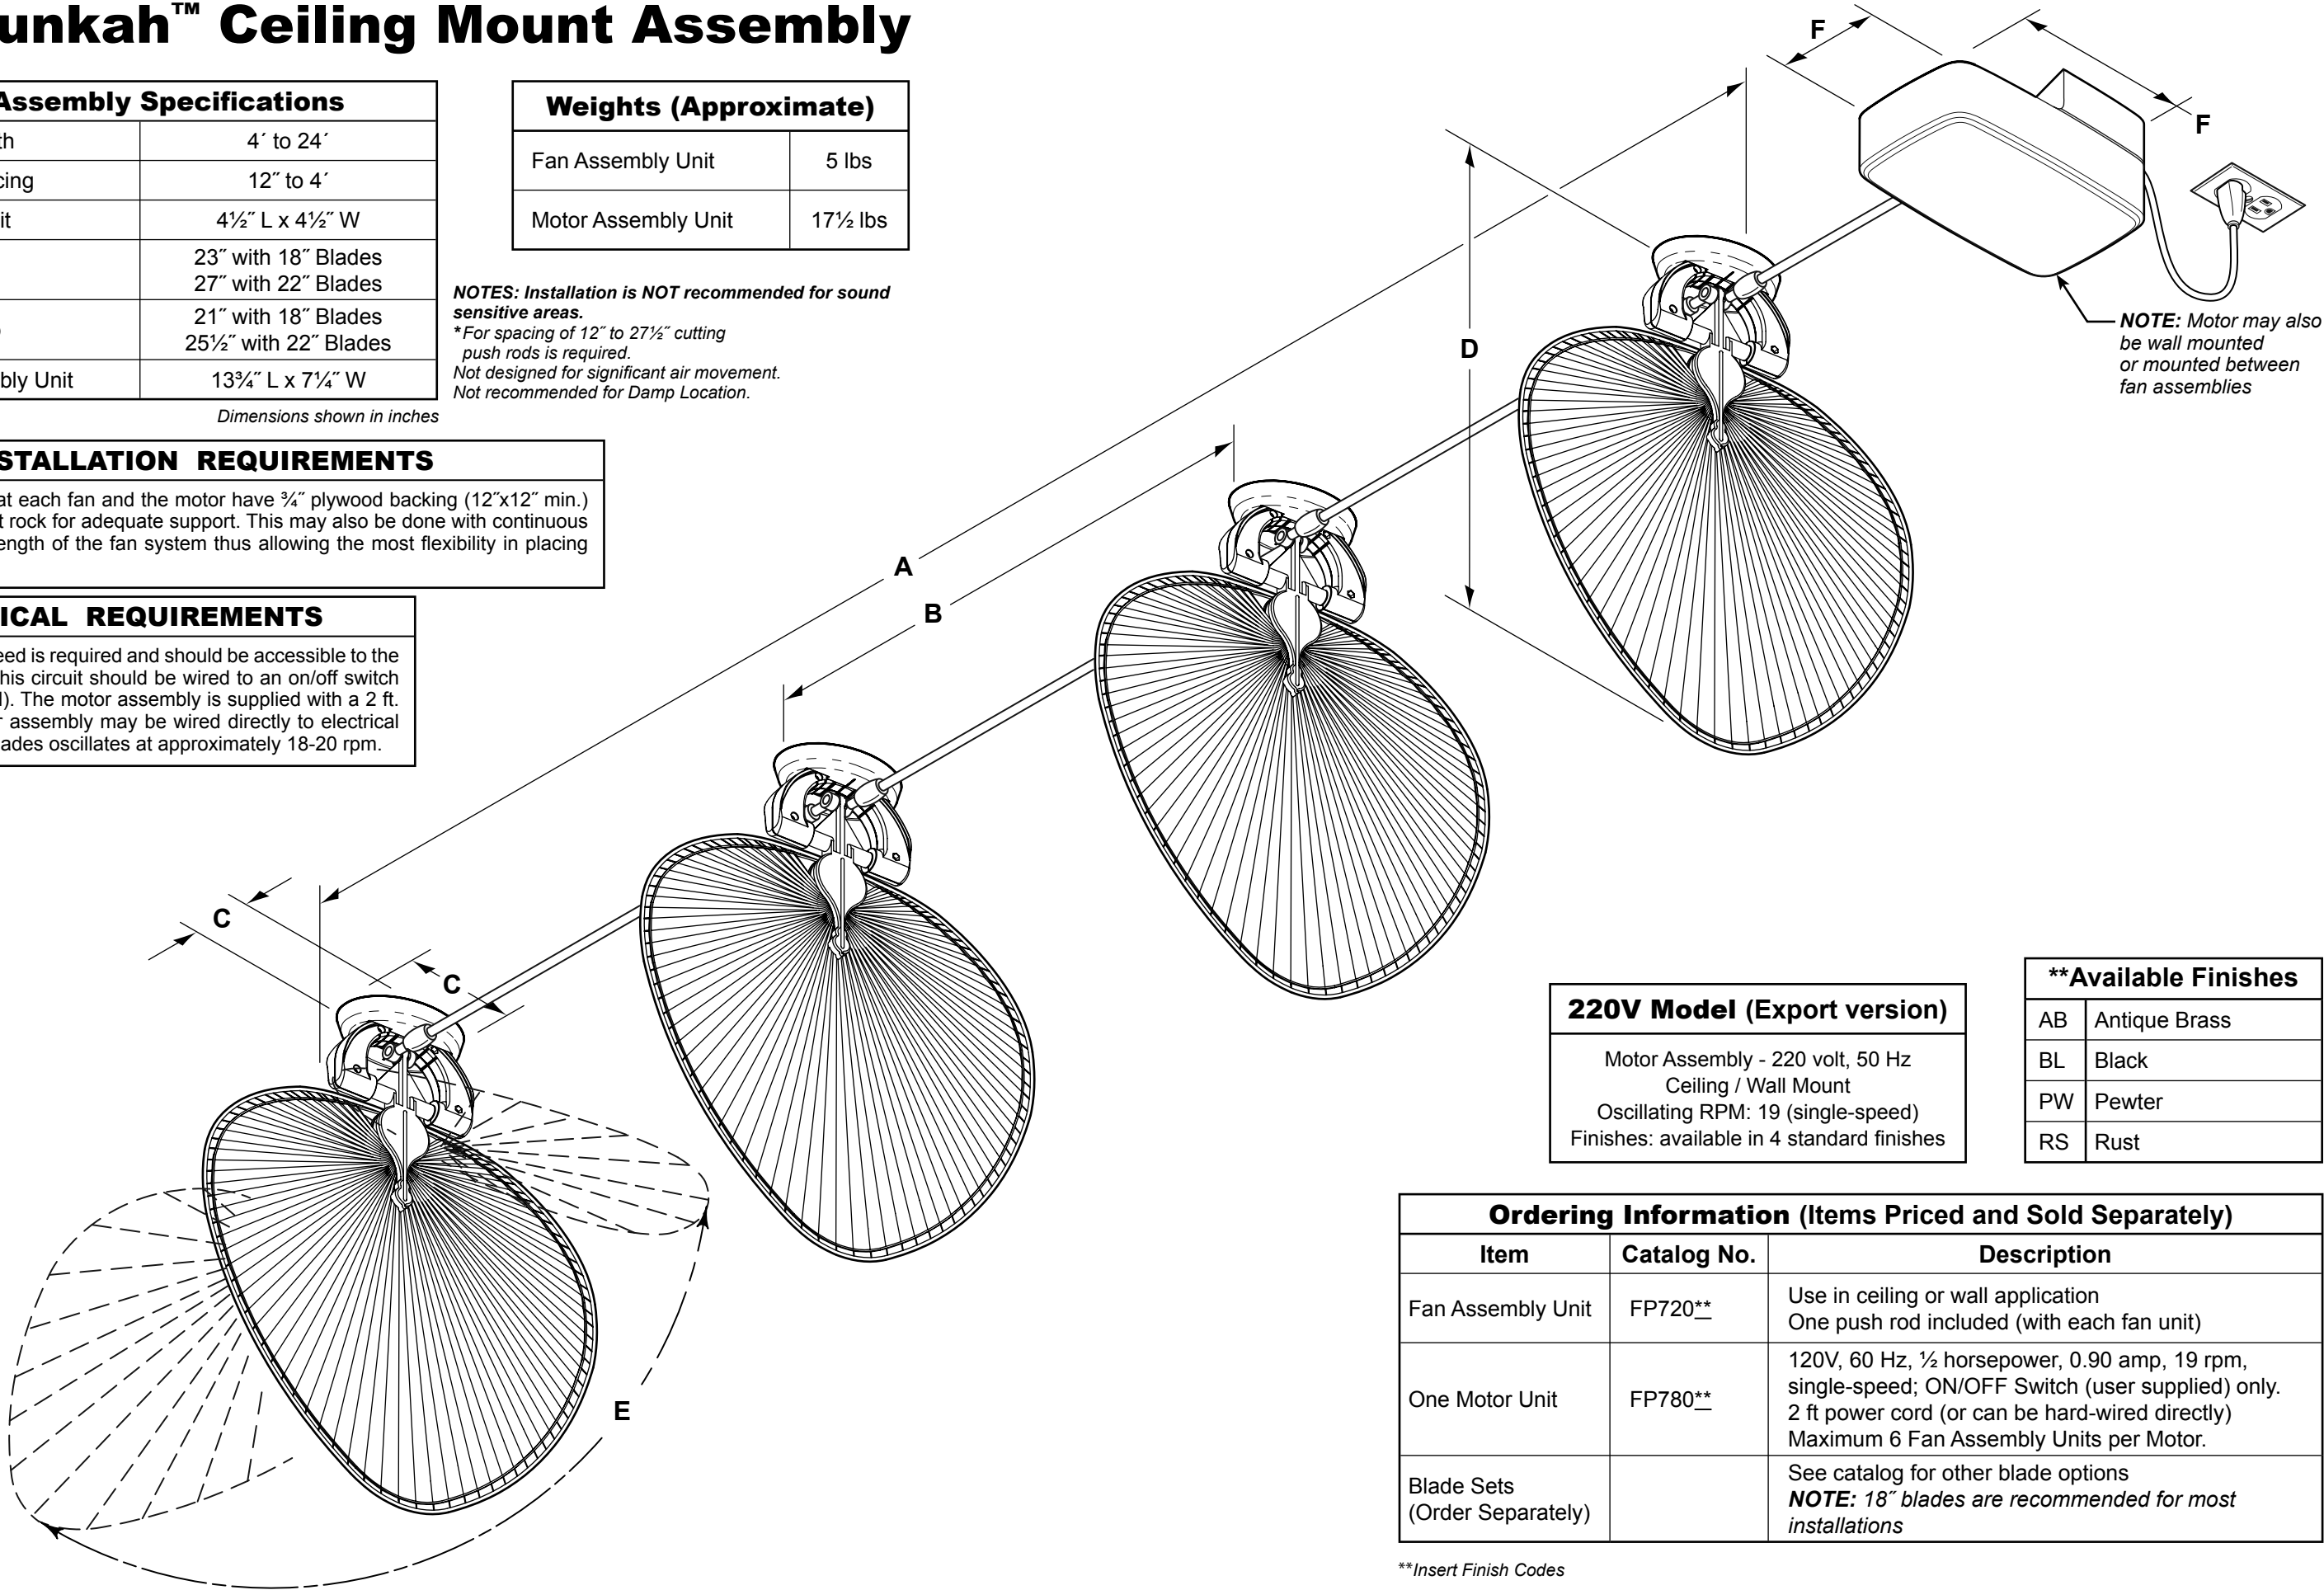

| 220V Model (Export version)                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------|
| Motor Assembly - 220 volt, 50 Hz<br>Ceiling / Wall Mount<br>Oscillating RPM: 19 (single-speed)<br>Finishes: available in 4 standard finishes |

| **Available Finishes |               |
|----------------------|---------------|
| AB                   | Antique Brass |
| BL                   | Black         |
| PW                   | Pewter        |
| RS                   | Rust          |

| Ordering Information (Items Priced and Sold Separately) |             |                                                                                                                                                                                              |
|---------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item                                                    | Catalog No. | Description                                                                                                                                                                                  |
| Fan Assembly Unit                                       | FP720**     | Use in ceiling or wall application<br>One push rod included (with each fan unit)                                                                                                             |
| One Motor Unit                                          | FP780**     | 120V, 60 Hz, ½ horsepower, 0.90 amp, 19 rpm, single-speed; ON/OFF Switch (user supplied) only.<br>2 ft power cord (or can be hard-wired directly)<br>Maximum 6 Fan Assembly Units per Motor. |
| Blade Sets<br>(Order Separately)                        |             | See catalog for other blade options<br><b>NOTE:</b> 18" blades are recommended for most installations                                                                                        |

\*\*Insert Finish Codes