


The Treventi™

FP2500 Series




SPECIFICATION SHEET

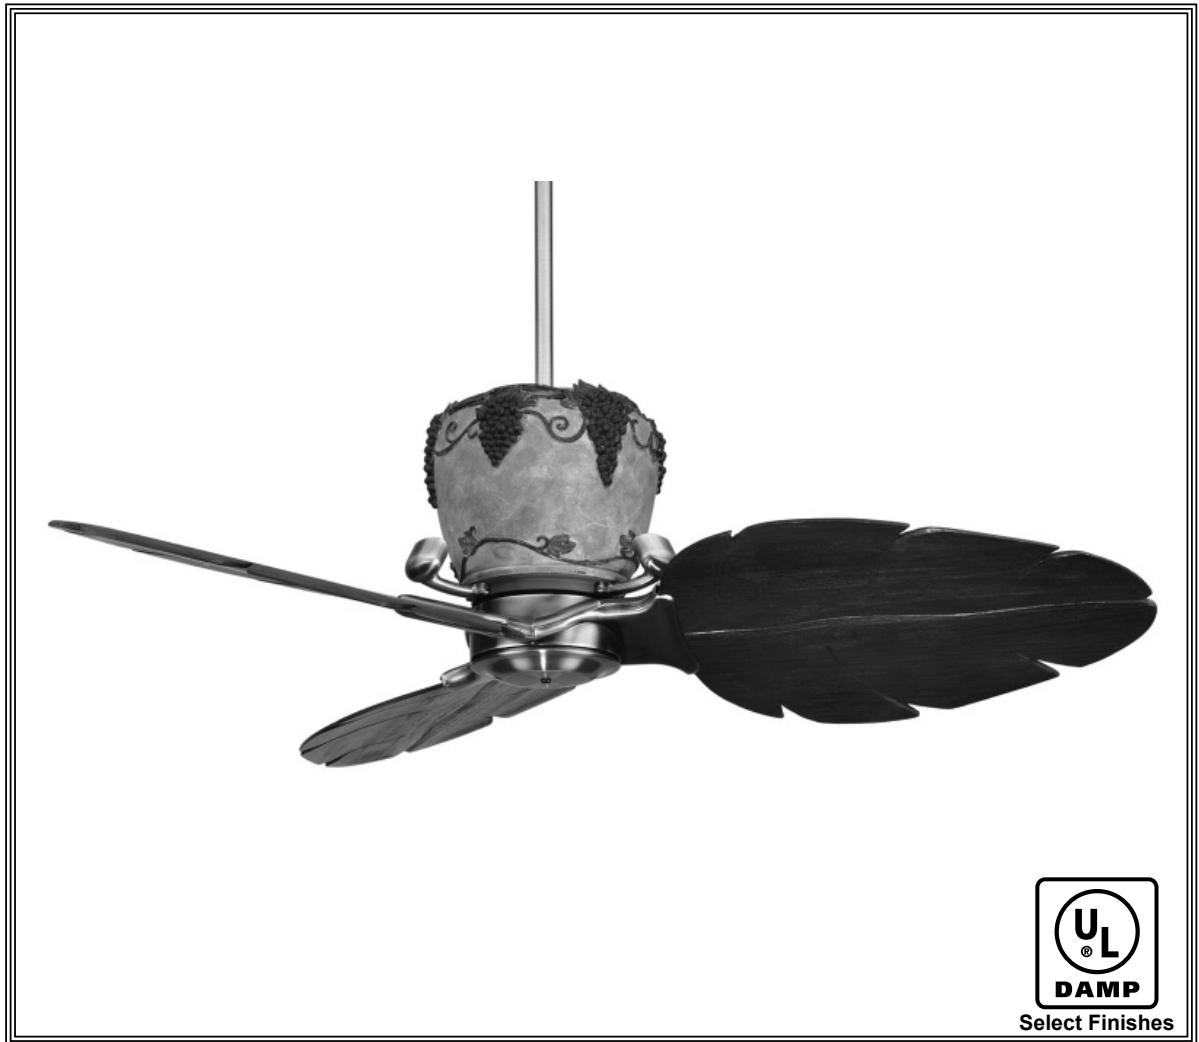

Product Specifications subject to change

The Treventi™ Fan Assembly – FP2500**

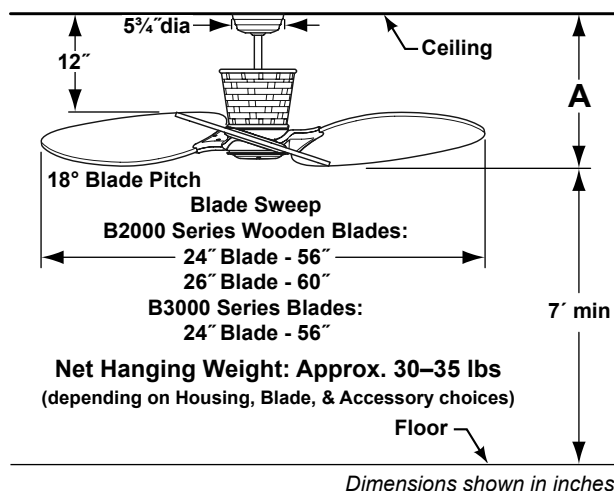

**Available Finishes	
AB	Antique Brass
AC	Antique Copper
BL	Black (Damp)
MC	Marbled Cream (Damp)
MW	Matte White (Damp)
PW	Pewter
RS	Rust (Damp)
SN	Satin Nickel

Fan Assembly	A
Fan w/7" downrod	18"
Fan w/12" downrod	23"
Fan w/18" downrod	29"
Fan w/24" downrod	35"
Fan w/36" downrod	47"
Fan w/48" downrod	59"
Fan w/60" downrod	71"
Fan w/72" downrod	83"

INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 50 pounds. A lag bolt will pass through the junction box and into the wood member above.

ELECTRICAL REQUIREMENTS / MOTOR ASSEMBLY (MA25**):

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version is available. **Fan speeds:** will vary according to the blade set. Material, shape, and size of fan blade will affect the speed of the fan. In general, the larger blades will turn slower than the smaller blades and the narrower blades will turn faster than the wide blades.

HOUSING ASSEMBLY (HA25__):

The motor housing (sold separately) are available in many different styles, materials and finishes to fit your decor. See Catalog or visit our website, www.fanimation.com for more housing selections.

CONTROL OPTIONS:

The hand-held remote control (C22), wall control (C23, includes white faceplate) and receiver (P2550) are all included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, reverse, up/down light controls, and off button. Installation and operating instructions provided with each control.

LIGHTING OPTIONS:

The 3-bulb uplight fixture is included with this fan assembly, with a maximum of 120 watts (candelabra bulbs, 40 watt max - not included). Optional Side-Light Kit (LK25 - bulbs included) is available. Maximum wattage including uplight, sidelight and downlight not to exceed 300 watts. See Catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Treventi™ fan comes with a standard 7" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Treventi™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 7" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

B2000 & B3000 Series Blades: (sold separately) are available, see Catalog or visit our website, www.fanimation.com for more blade selections.



10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com

