


The Tropicana[®]

FP1600, FP1610, FP1620 Series




SPECIFICATION SHEET

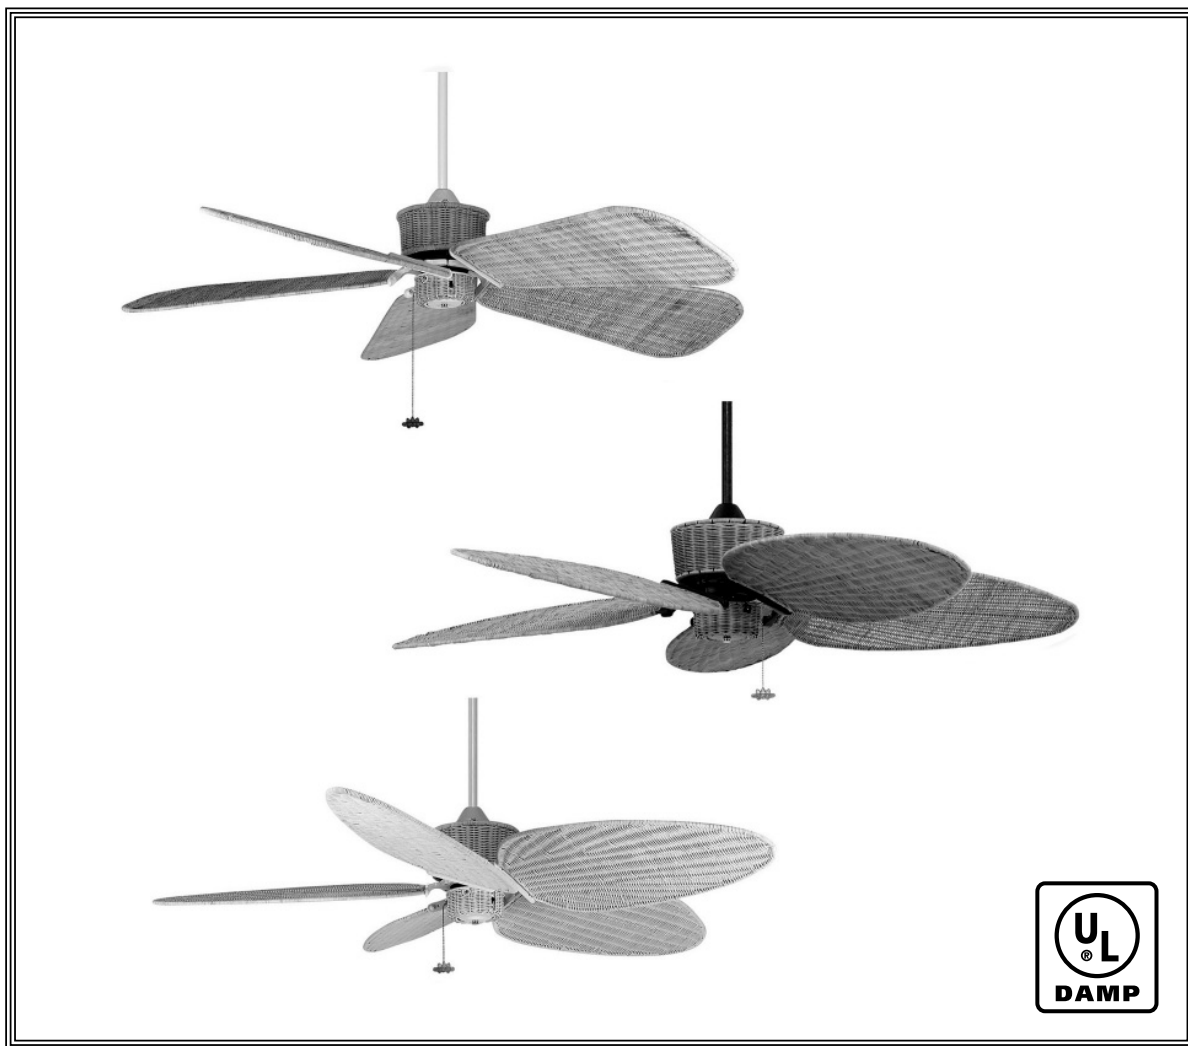

Product Specifications subject to change

The Tropicana® Fan Assembly

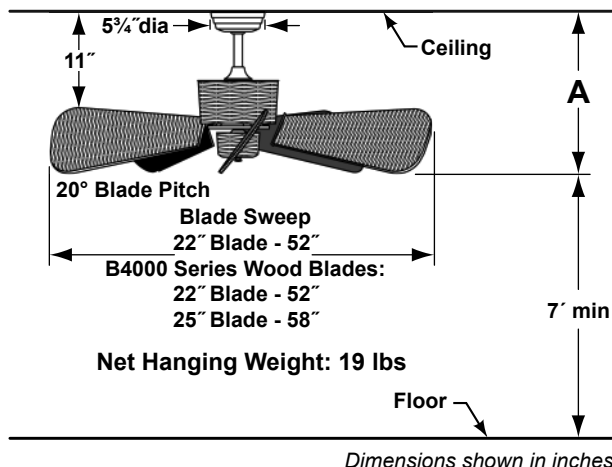

Fan Assembly	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

Model No.	Trim Finishes	Wicker Finishes	Blade Shape
FP1600NO / SO	Marbled Cream	Natural	Narrow Oval or Std. Oar
FP1610NO / SO	White	White	Narrow Oval or Std. Oar
FP1620NO	Rust	Natural	Narrow Oval

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

Fan speeds: 1st pull - High = 70 rpm; 2nd pull - Medium = 40 rpm; 3rd pull - Low = 25 rpm.

CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, www.fanimation.com for more control options.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Tropicana® fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Tropicana® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling kits are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 5 wicker blades are included with this fan. Mounting four blades is an option.

DAMP LOCATION:

Fan rated for Damp Location usage.



**10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com**

